



Airless Paint Spray gun



PIPECOTER-IV



Pipecoater 3_6"



PIPE PRO XL Internal pipe CleNING

Spin blast 8_32"



Pipecoater 8_32"



XTR_6 Airless spray Gun

Needle Assembly and GHD RAC Switch Tip

- *Exceptional life, pattern and finish
- *Great for high solids coatings
- *Factory set needle needs no adjustments

Variety of Handle and Trigger Options

- 4_finger trigger options
- Oval_insulated or round handle

Trigger Guard

- *Easily detaches for access to filter
- *Acts as wrench to remove filter from gun handle
- *small profile sprays in tight areas

SWIVEL Allows easier gun movement under high pressure



The light weight of this gun in the hand of the operator increases the work efficiency.

The needle with hard chrome coating and ceramic nozzle head of this gun is suitable for spraying coatings with high solids.

This airless paint gun is an ideal option for colors that are difficult to spray.

A filter inside the handle that has a very long life and needs to be cleaned and reused, not repurchased. Four-finger handle and trigger helps for better performance in spraying.

The compact design allows access to tight spaces.

The construction of this gun is made with high-quality materials, the main body is T6 industrial aluminum, hard work. Maximum internal liquid pressure model XTR6

6000 psi or 420 bar

Round handle with the ability to rotate at the bottom of the waste joint connected to the paint hose. All connections of this gun are made of steel.

SpinBlast 8_36 inch Suitable for contractors

Anti_wear steel central
shaft

Steel rotating head
3/4 nozzle

Anti_wear
polyamide wheels

tungsten carbide
sandblasting
nozzle



General specifications of the pipeblasting machine

The purchase price of the pipeblasting machine

Dimensions : length 40 cm ,

axis diameter : 4 inches

, the main tube of the device is metal with chrome coating,

anti-wear steel head,

anti-wear plastic wheels,


tungsten carbide nozzle with metal coating in dimensions 6 x 3/4 and 12 x 3/4,

adjustable speed,

adjustable surface Inside the tube from size 8 to 36 inches

with wooden pallet packaging for easy transportation

General pipecoater 8_36 suitable for all colors

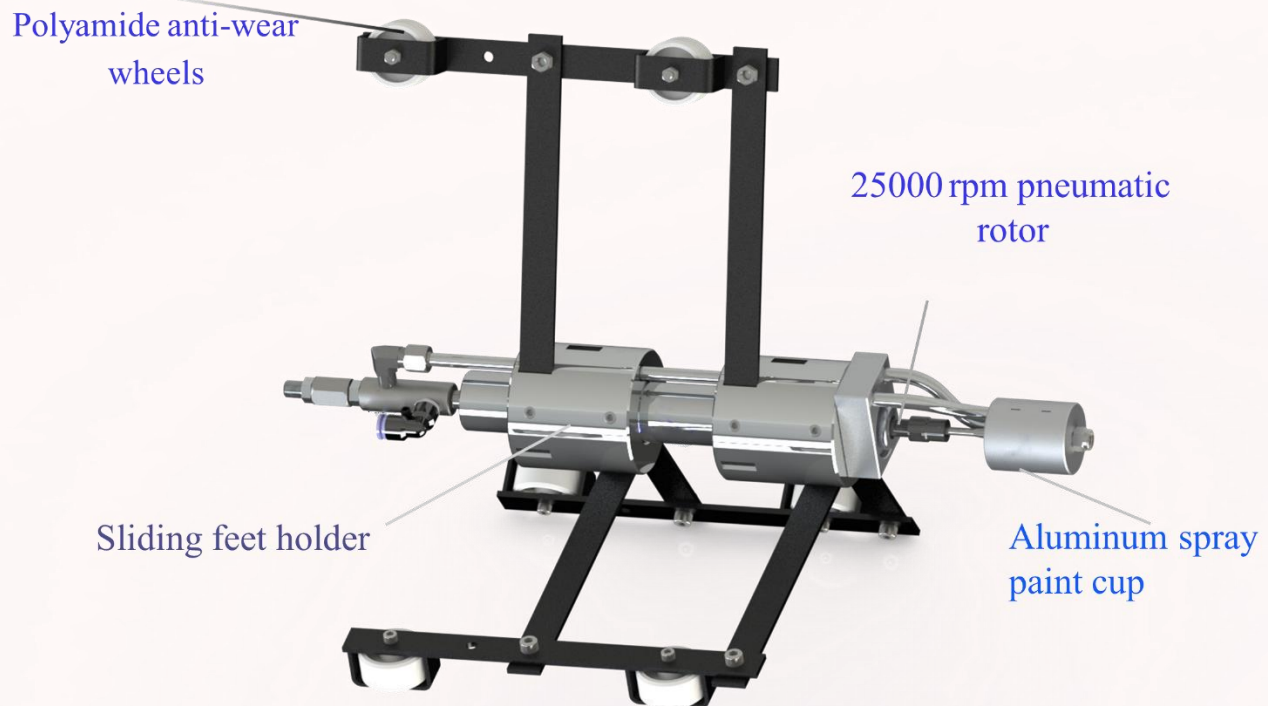


Specifications of pipe coater III 900

Specifications of pipecoater III 900. Dimensions: length. 50cm, 3/7 inch axle diameter. Metal axle tube with shiny chrome coating. Aluminum spray bowl, two anti-shear plastic wheels, oneway motor with 25000 RPM speed, 1/2 inch twin dehumidifier, usable inside the pipe from size

8 to 36 inches, pneumatic hose, 30 bar pressure, wooden pallet packaging Easy shipping

Pipecoter_III/150 3-6 suitable for all colors

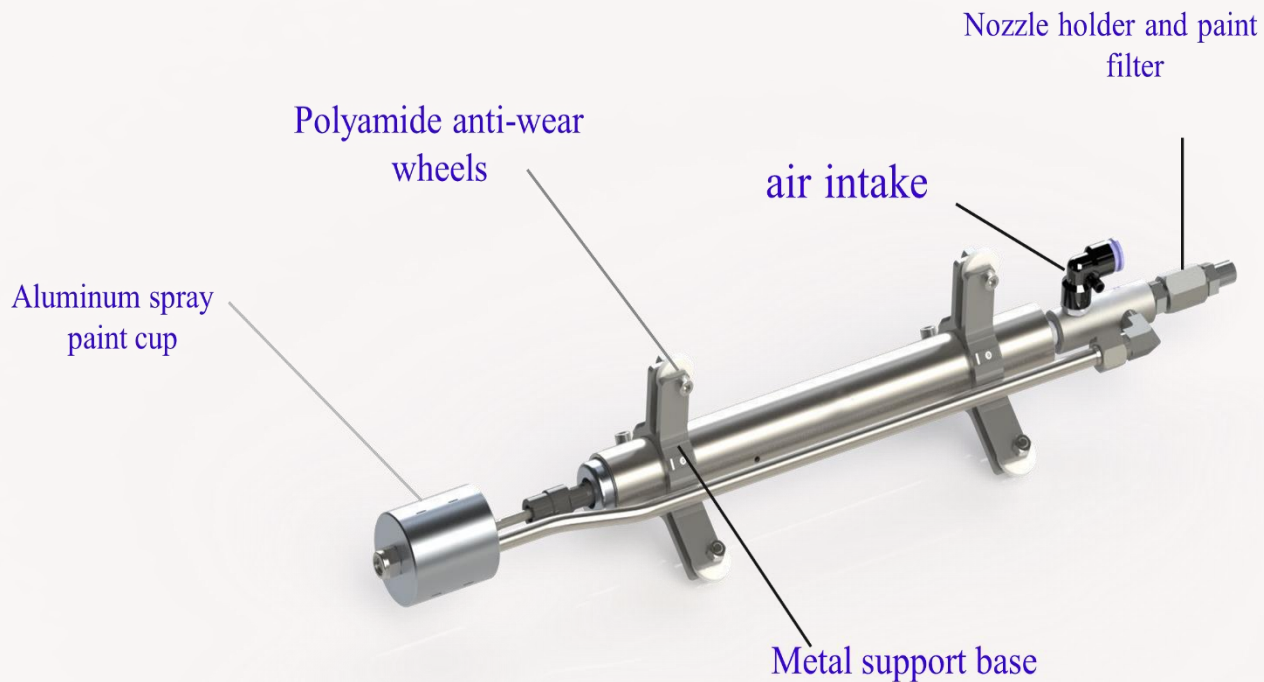

Internal Pipecoater for Pipe ID 76mm to 150mm

Designed for pipes with a diameter of 3-6 inches


Speed 25000 rpm

Chrome coating on the entire metal surface of the device

Suitable for all paints with high solids


PIPE COTER-IV

Internal Pipecoater for pipe
ID 25mm to 300mm

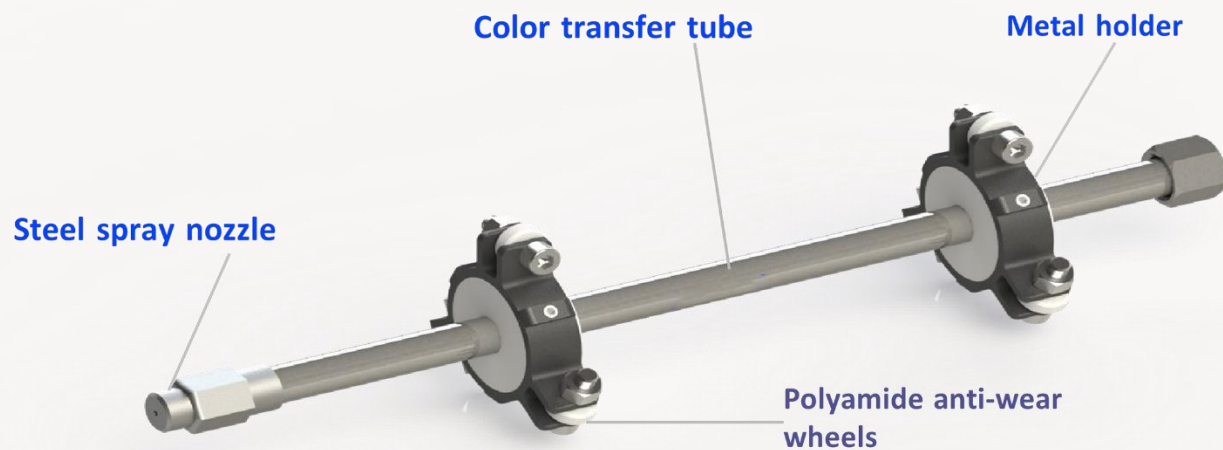


PIPECOATER-IV tool is designed to coat the inside of pipe or tubing ranging from 25 to 300 mm (1"-12") ID without the need to rotate pipe or tubing and to apply an even paint film thickness throughout. Generally, any type of coating may be used in this tool that can be airless sprayed.

PIPE PRO XL INTERNAL PIPE CLEANING

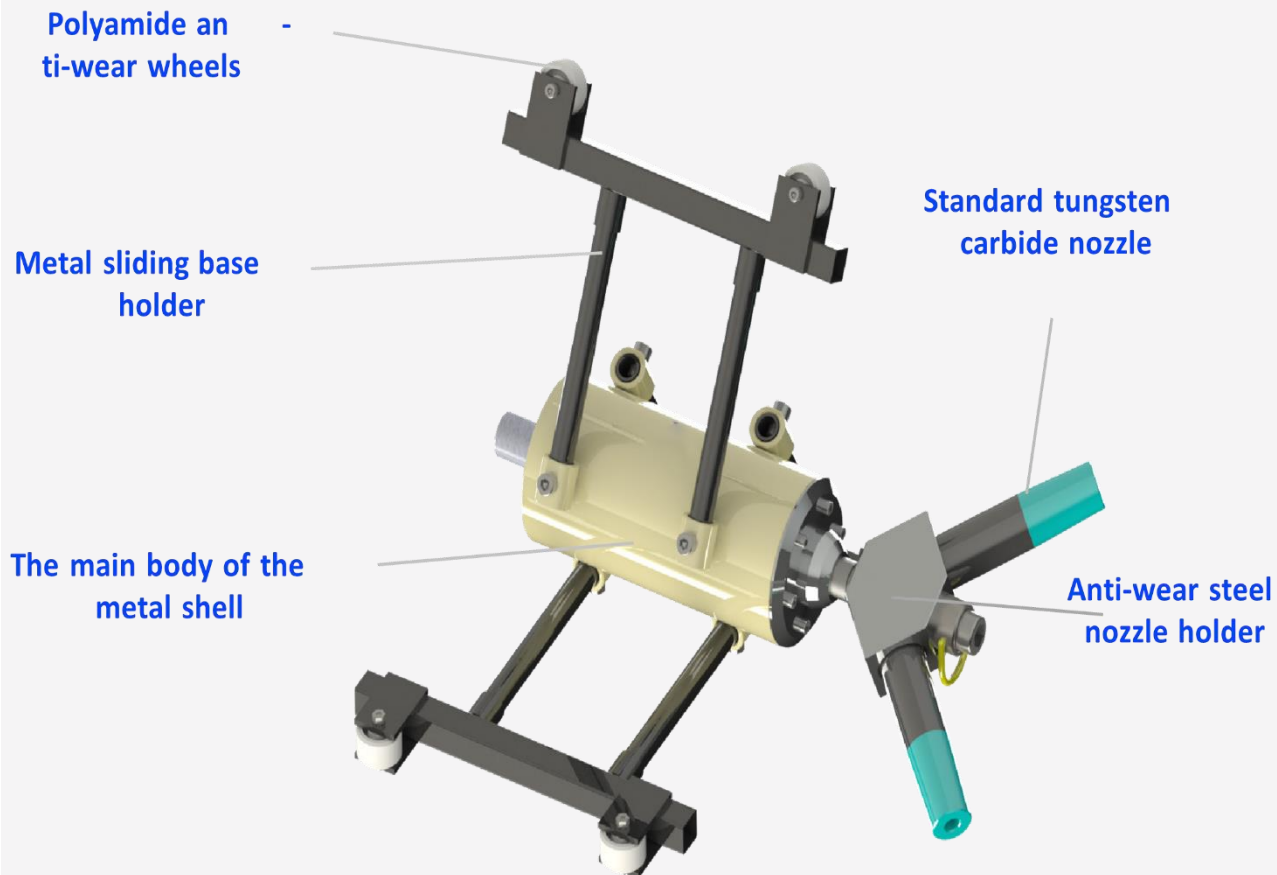


This device is designed for pipes from size 36 inches and above. It has a pneumatic gearbox inside the shell. High efficiency, adjustable torque speed for internal axis. Made of the best anti-wear steel

ANGLE NOZZLE

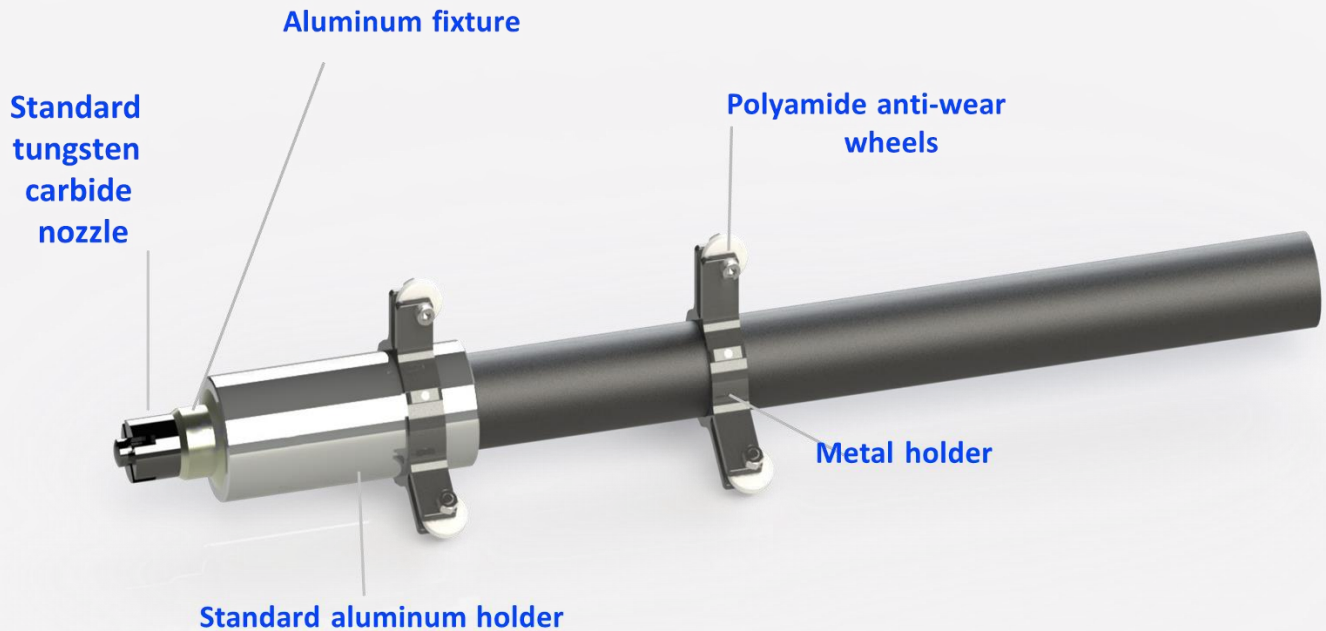

This product is designed for tubes with a diameter of 3-6 inches, tungsten carbide material, 4 angled outlets, standard aluminum thread, metal holder, along with the carriage base.

The maximum required air pressure is 7 cubic meters per minute, 100 psi, the outlet diameter is 7 mm on each side.

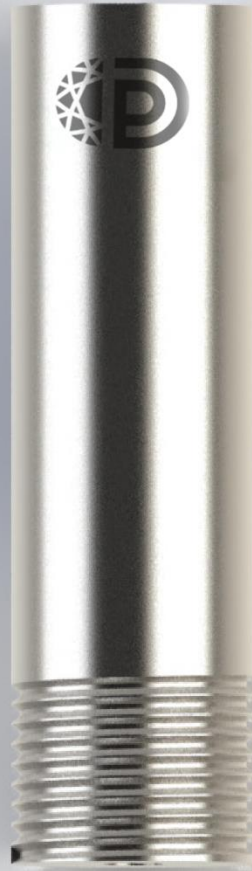

**Tungsten carbide nozzle 3/4
aluminum coating**

Aluminum holder





Email: petro_diamond@yahoo.com

+989367975756

Address:

+9647833222451

Iran,Khorramshahr,Baba Taher Street,second floor,No 200